

CAUTION If you are not familiar with construction, hardware or the use of tools, please use a qualified general contractor to install. Improper installation may cause injury.

Safety First: Before entering a rope hammock chair, inspect your rope hammock chair, hardware, installation points and objects supporting your rope hammock chair for wear or weakness. Proceed carefully and take your time getting into and out of your rope hammock chair. Any hammock chair may tip if your weight isn't centered. A hammock chair is not a playground swing or a trampoline. Excessive swinging and other rough play may result in falls and may wear out your hammock chair and hardware prematurely. Small children should not play unsupervised in your hammock chair.

Rope Hammock Chair Care and Maintenance:

To prevent mildew and increase the useful life of your rope hammock chair, store it in a dry location during seasons and time periods when it is not in use. Avoid keeping in direct sunlight and rain for long durations. Some fading may occur.

Cleaning:

Your rope hammock chair is hand washable with cold water and a mild detergent or soap. Do not use harsh chemical cleaners or bleach. Rinse well and let it dry thoroughly before storing. Keep rope and loops away from fabric while cleaning.

Storage:


Make sure the rope hammock chair is completely dry before storing in a dry location.

HANGING INSTRUCTIONS

Take proper safety precaution when hanging Rope Hammock Chair. Since most hammock chairs are handcrafted, you should measure the overall height of your hammock chair, in order to determine the best hanging option for use. When installing Rope Hammock Chair outside make sure that it is no less than 6 away feet from any obstruction such as fence, garage, house, overhanging branches, laundry lines or electrical wires.

Overhead Beam Mounting (Porch, Patio, or Deck) – When installing the rope hammock chair, make sure the beam is strong enough to support the weight of the person using the hammock chair. The components of the hammock chair will stretch slightly when you sit on it for the first time. Keep this in mind when determining the height to install the hammock chair from the floor or ground. The hammock chair should be 2-3 feet off the ground. Pre-drill a 1/2" diameter hole into the beam. Then screw the eye screw with swivel hook all the way in and make sure it is in tightly. Then hook the ring at the end of the ropes onto the swivel hook. An eye screw with swivel hook is included. *****IMPORTANT: WHEN USING EYE SCREWS, MAKE SURE TO TIGHTLY SCREW IN THE EYE SCREW ALL THE WAY IN THE BEAM.*****

Tree Mounting – When installing a the rope hammock chair, make sure tree branch is strong enough to support the weight of the person using the rope hammock chair. Select a tree branch with a minimum of 12 inches in diameter and that is about 9 feet above ground. The hammock chair should be 2-3 feet off the ground once it is installed. Appropriate hardware like tree strap and "S" hook are needed for support and attachment to tree. Check with your local hardware store to determine the size of the rope, chain, or "S" hook. Follow the steps on the next page for detailed instructions on securing a Twisting Eyescrew and Hook.

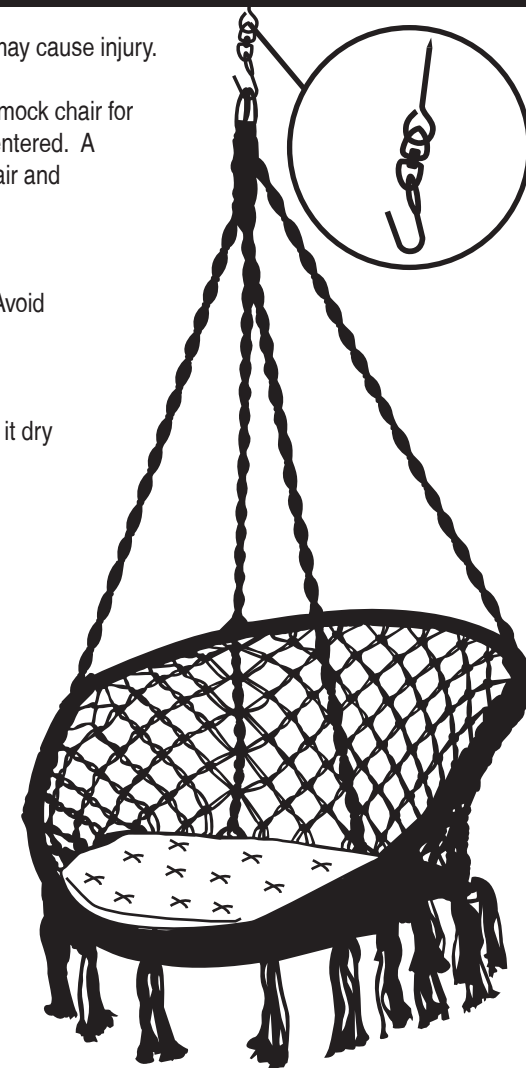

CAUTION

CAUTION: Falling and Strangulation Hazard! Hammocks can be unstable. Be careful entering and exiting your hammock chair as injury may result. Children can become entangled in hammock chair strings. NEVER leave children or pets unattended in hammock.



READ BEFORE INSTALLING HAMMOCK CHAIR



DO NOT USE UNLESS PRODUCT IS PROPERLY INSTALLED



IMPORTANT: When using the included Eye Screws, first drill a 2-inch deep pilot hole using a straight 5/16-inch bit. Then tighten each eye screw all the way in the hardwood tree before hanging your hammock chair. (Illustrated directions below)

**RECOMMENDED TOOLS
(NOT INCLUDED)**



Electric Drill



5/16-inch Straight Bit

Screwdriver
(for leverage when tightening)




NOTE: Ideally, screwdriver shaft should be at least 6 inches long by 1/4-inch thick

1


PRE-DRILL 2-INCH DEEP PILOT HOLE USING A

5/16 INCH
STRAIGHT BIT



NOTE: Drill & drill bit not included.

**INTO THE BOTTOM OF A
HARDWOOD TREE BRANCH**

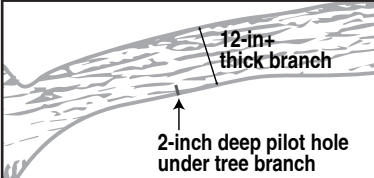



12-in+
thick branch

2-inch deep pilot hole
under tree branch

HARDWOOD TREE BRANCH should have at least a 12-inch diameter (OR a circumference that is greater than 37.5 inches)

2


**ALIGN EYE SCREW WITH THE
PILOT HOLE & HAND TIGHTEN**

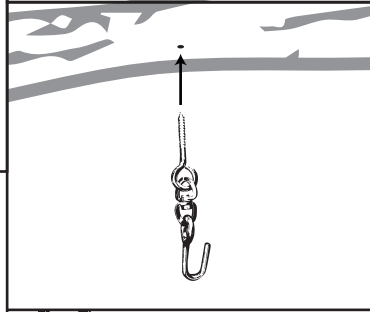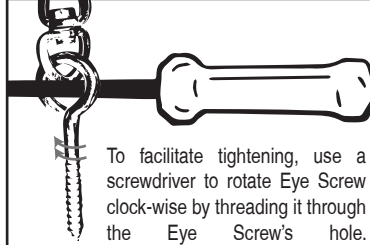To facilitate tightening, use a screwdriver to rotate Eye Screw clock-wise by threading it through the Eye Screw's hole.

3

**MAKE SURE TO TIGHTEN EYE SCREW
ENOUGH TO COVER ALL THREADS**

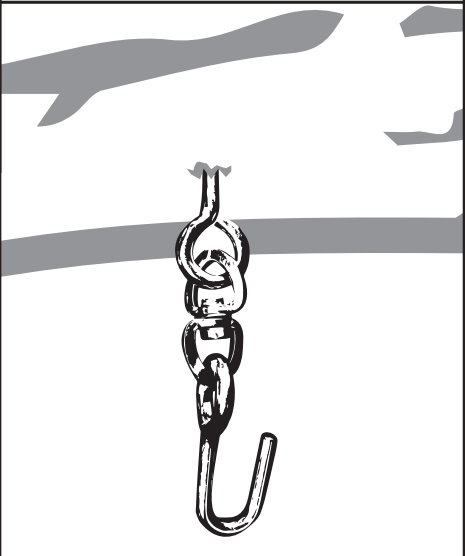

CAUTION If you are not familiar with construction, hardware or the use of tools, please use a qualified general contractor to install. Improper installation may cause injury.

SAFETY FIRST: Before entering a hammock chair, inspect your hammock chair, hardware, installation points and objects supporting your hammock chair for wear or weakness. Proceed carefully and take your time getting into and out of your hammock chair. Any hammock chairs may tip if your weight isn't centered. A hammock chair is not a playground swing or a trampoline. Do not swing or twirl on your hammock chair. Excessive swinging and other rough play may result in falls and may wear out your hammock chair and hardware prematurely. Small children should not play unsupervised in your hammock chair.